

Speed Queen®

MULTI-HOUSING

Coin Slide
Commercial Washers & Dryers
COIN



BUILT FOR **RELIABLE** PERFORMANCE.

Speed Queen offers the most complete range of coin slide operated laundry products including top and front load washers, and single and stack dryers, for the variety of needs in multi-housing properties.


With features such as water and energy efficient designs, quality internal components and high security systems, multi-housing owners can depend on Speed Queen. The equipment gives them the advantage on such issues as energy conservation, equipment breakdowns and vandalism. Durable porcelain enamel tops and lids resist corrosion and scratching, assuring long-last appearance.

COIN SLIDE Control is easy to use and offers the basic features needed for optimal coin-vended laundry room operations. All front control models all come with high capacity meter case.




TOP LOAD WASHER

The Speed Queen coin slide operated top load washer gives building owners and property managers unparalleled ability to reduce water and energy costs while reducing operating costs. The top load washer has met every design standard to be Department of Energy compliant for energy and water savings for commercial washer standards.

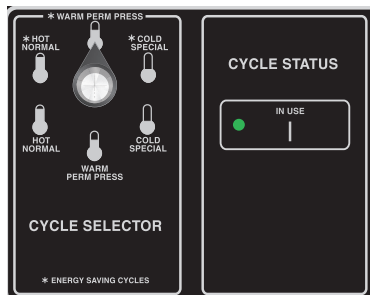

One Speed

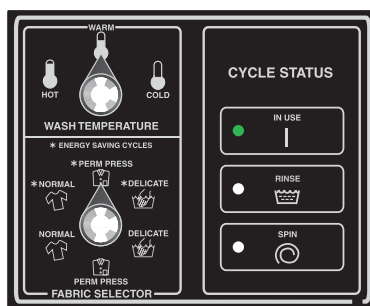

Two Speed

FEATURES

HIGH SPEED EXTRACT

710 RPM final spin to maximize moisture removal from clothes.

AUTOMATIC BALANCING SUSPENSION SYSTEM

ABS provides the industry's best out-of-balance handling, completing wash cycles without interruption.

DURABLE STAINLESS STEEL AND PORCELAIN ENAMEL WASH TUB

FOUR-VANE POLYPROPYLENE AGITATOR

210° agitation stroke delivers superior washability for all load sizes.

SINGLE LOAD DRYER



Speed Queen's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Our cabinet design maintains the perfect balance of heat, airflow and tumble action for optimal performance and efficiency.

FEATURES

SUPERIOR DRYING CONVENIENCE

Industry's largest door opening 2.06 sq. ft. (1914 cm²).

EFFICIENT DRYER HEATING


With 25,000 BTU (gas models) and up to 5,350 Watts (electric models), Speed Queen dryers offer some of the fastest drying times in the industry.

UPFRONT LINT FILTER

Easy to clean and secured.

REVERSIBLE DOOR (SOLID DOORS ONLY)

For installation flexibility.

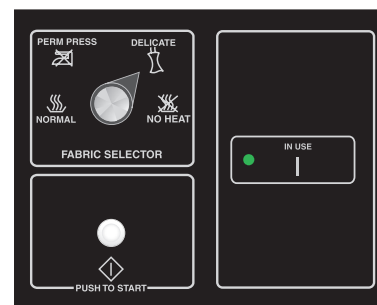

STACK DRYER

The Speed Queen stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage. ADA Compliant (bottom dryer only).



FRONT LOAD WASHER

The Speed Queen front load washer gives building owners and property managers unparalleled ability to reduce water and energy costs while reducing operating costs. The front load rear control washer has met every design standard to be 100% ADA compliant.

FEATURES

REVOLUTIONARY BALANCING TECHNOLOGY

Improved out-of-balance technology that uses a redesigned suspension and advanced sensing to manage and redistribute out-of-balanced loads, delivering uninterrupted cycles.

LOW WATER USAGE

Per cycle to reduce operating costs.

HIGH SPEED EXTRACT

1200 RPM final spin exerts 440 G-Force to maximize moisture removal from clothes.

LARGER DOOR OPENING


Extra wide 15.5" (394 cm) for easy loading and unloading of clothes.

STAINLESS STEEL WASH TUB

Comes with a lifetime warranty, and actually becomes smoother with each use, so it won't pill, snag or fray clothes.

MULTI-COMPARTMENT SUPPLY DISPENSER

Automatically adds detergent, bleach and softener.

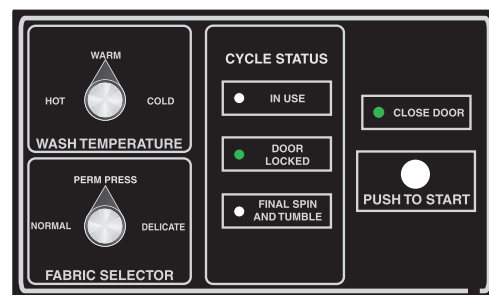

ENERGY STAR®
Certified Washer

COIN SLIDE CONTROL COMMERCIAL WASHER & DRYER SPECIFICATIONS

MODELS {NOTE: Coin Box Sold Separately}	Top Load Washer	Front Load Washer	Single Load Dryer	Stack Dryer
	SWNSX1PP112TW01 SWNSX1SP112TW01 SWNSX2PP112TW01 SWNSX2SP112TW01 SWNSX2PP112TW02•	SFNSXRSP113TW01 SFNSXRSP113TW02•	Electric 208: SDE907WF1500 Electric 240: SDE907WF Gas: SDG909WF SDESXRG171TW02• SDGSXRG111TW02•	Electric 208: SSESXAGS151TW01 Electric 240: SSESXAGS171TW01 Gas: SSGSXAGS111TW01 Electric 208: SSESXAGW171TW01• Gas: SSGSXAGW111TW01•
Porcelain, Stainless Basket/Cylinder Volume - cu.ft. (liters)	3.26 (92.3)	3.42 (96.8)	7.0 (198)	7.0 (198) ea pocket
Width - in (mm)	25 5/8" (651)	26 7/8" (683)	26 7/8" (683)	26 7/8" (683)
Depth - in (mm)	28" (711)	27 3/4" (704)	28" (711)	28" (711)
Height - in (mm) standard capacity high capacity•	43" (1092) 43 7/8" (1114)	43" (1092) 44 3/8" (1126)	43" (1092) 43 7/8" (1114)	78 3/16 (1986)
Weight - lb (kg)	190 (86)	253 (114.8)	Electric: 135 (61) Gas: 140 (64)	Electric: 265 (120) Gas: 275 (125)
Shipping Weight - lb (kg)	210 (95)	273 (123.8)	Electric: 145 (66) Gas: 150 (68)	Electric: 280 (127) Gas: 290 (132)
Cycle Time - minutes (default)	28-31	27	45	45 ea
Motor - HP (kW)	1/2 (0.37)	0.9 HP (671 W)	1/3 HP (5.5 amps)	1/3 HP (5.5 amps)
Water Consumption - gal/cycle (Liter)	27.3 (103.4)	11.7 (44.3)	N/A	N/A
Water Factor - gal/ft³ (Liters/Liter/cycle)	8.4 (1.12)	3.8 (0.52)	N/A	N/A
Modified Energy Factor - ft³/kWh/cycle (Liters/kWh/cycle)	1.65 (46.7)	2.98 (84.48)	N/A	N/A
Average Hot Water Per Cycle - gal (Liter)	2.3 (8.8)	0.4 (1.4)	N/A	N/A
Water Pressure PSI (Bar)	20-120 (1.4-8.3)	20-120 (1.4-8.3)	N/A	N/A
Spin Speed - RPM	2 sp 473 1 sp 710	500, 800, 1000	N/A	N/A
Cycle/Temperature	Normal Perm Press Delicate	Normal Perm Press Delicate	Normal Perm Press Delicate No Heat	Normal Perm Press Delicate No Heat
Electrical Specifications and Circuit Requirements	120/60/1-15 amp	120/60/1-15 amp	Electric: 120/208/60/1-30 amp Gas: 120/240/60/1-30 amp* 120-60/1-15 amp	Electric: 2 ea 120/208/60/1-30 amp Gas: 2 ea 120/240/60/1-30 amp* 120-60/1-15 amp
Btu per Hour (kcal)	N/A	N/A	25,000 (6300)	25,000 (6300)
Heating Element**	N/A	N/A	4750W, 208V 5350W, 240V	4750W, 208V 5350W, 240V
Type of Gas (Gas models only)	N/A	N/A	Factory-equipped natural/mixed gas convertible to LP gas**	Factory-equipped natural/mixed gas convertible to LP gas**
Utility Connections - in (mm)	N/A	N/A	Gas: 3/8" NPT (9.5)	Gas: 3/8" NPT (9.5)
Air Outlet Diameter - in (mm)	N/A	N/A	4" (102)	4" (102)
Exhaust Airflow - cfm (liters/sec)†	N/A	N/A	220 (105)	220 (105)
Maximum Exhaust Static Back Pressure	N/A		0.6" W.C.	0.6" W.C.
Agency Approval	cCSAus	cCSAus	Electric: cULus Gas: cCSAus	Electric: cULus Gas: cCSAus
Activation	Coin/Card Op	Coin/Card Op	Coin/Card Op	Coin/Card Op
Top and Lid Finish	Porcelain	Porcelain	Porcelain	N/A
Colors	White	White	White	White
Door Type	N/A	Window	Solid	Solid, Window
Drain	Pump	Pump	N/A	N/A

* Electric dryers come equipped for 120/240/60/1 operation. They can be field converted to operate on 120/208/60/1 with optional 61928 conversion kit.
Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

** IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

† Measured at point of exit from dryer.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the U.S.A.



Speed Queen®